

Subject:

Checklock SQ - Wheel Nut Retainer

Date of Issue 5/8/2014

Checklock so®



Checklock SQ® helps to retain two adjacent nuts. Its coil-like structure reduces likelihood of nuts loosening.

Primary Functions: Provides a re-usable retaining function, reducing the likelihood of nuts loosening.

Primary Benefits: Manufactured in square section stainless steel. It improves safety and offers a quick visual check reducing maintenance costs and saving time. It is a durable and re-usable product. In most cases the Checklock SQ® can be fitted without any special tools. A cost effective solution reducing maintenance costs and saving time. Can also be used in conjunction with Checkpoints®.

Sizes: Size Guide shown below.


Material: High quality premium Stainless Steel.


SIZE GUIDE



Nut size (across the flats) mm

PCD (pitch circle diameter) mm

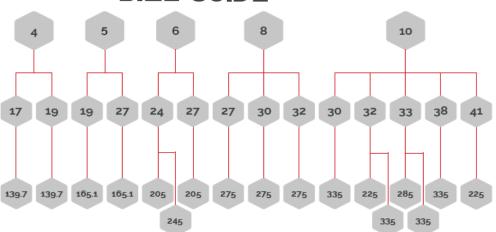



Pitch Circle Diameter (PCD) explained

Measure from the centre of any stud on the wheel to the centre of the stud directly opposite (mm).

PL Ref	# of Studs	Nut A/F (mm)	PCD
PL26808	4	17	139.7
PL26809	4	19	139.7
PL26810	5	19	165.1
PL26811	5	27	165.1
PL26812	6	24	205
PL26813	6	24	245
PL26814	6	27	205

PL Ref	# of Studs	Nut A/F (mm)	PCD
PL26815	8	27	275
PL26816	8	30	275
PL26817	8	32	275
PL26818	10	30	335
PL26819	10	32	225
PL26821	10	32	335
PL26822	10	33	285
PL26823	10	33	335
PL26824	10	38	335